


PRODUCT DATA SHEET

This issue dated 24.11.2016 is not subject to print or paper form.

GUMO LG

GRANULATE PADS

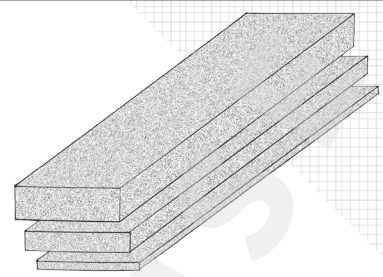

DESCRIPTION

GUMO LG is for height adjustment (spacer) between the decking substructure and foundation.

APPLICATION

Height adjustment spacer for the decking substructure.

FUNCTION DESCRIPTION

The pads are placed between the terrace substructure being of wood or wood like similar material or aluminium and foundation. Substructure is resistant to slipping. Height compensation between the foundation and substructure is achieved by stacking the rubber pads.

MATERIAL

PUR-bonded rubber granulate mat black

Compressive stress at 25% deformation: 0.60 N / mm² DIN EN ISO 3386-2

Temperature range - 40 ° C / + 115 ° C

Good weather resistance

STANDARD - CE MARK

The scope of application is not subject to approvals, certificates, etc. due to the lack of standard conformity requirements.


DIMENSIONS

Total Length 80 mm

Total width 40 mm

Design height 3 / 8 / 20 mm

Dimensional tolerances according to DIN 7715T5 P2

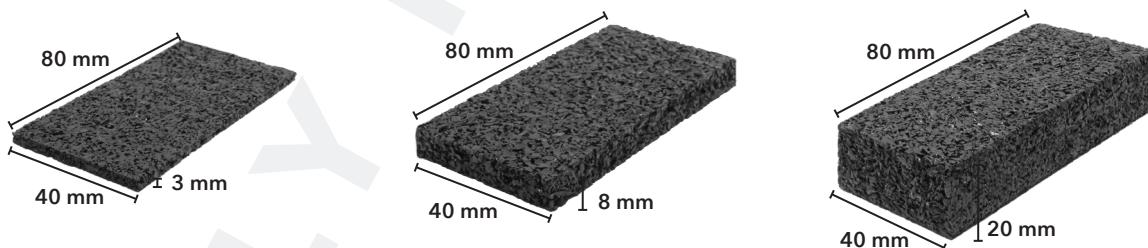

All data is based on our present knowledge and experience - a guarantee can not be derived from our data. The suitability of the product for a specific application can only be ensured by means of a test or trial. Errors, assortments and technical modifications are reserved. This is a translation - in case of doubt, please consult the original German version.